




PRODUCT INFORMATION

C50 Marine Camera

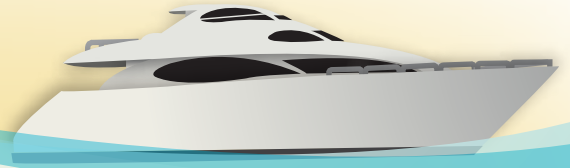

C50

Miniature Day/Night Waterproof Dome Camera

A Feature Packed On-Board Camera Providing Enhanced Visibility and Added Safety for Boat Owners

Compatible with most major chartplotters video inputs, the KJM-C50 provides increased visibility, adds to safety at sea, increased security while enhancing the boating experience.

- ▶ The C50 camera from marine specialists KJM features a high resolution camera module sealed inside a compact and stylish vandalproof housing that measures a mere 2.4" in diameter, certified waterproof to IP66 classification.
- ▶ Images switch from color to monochrome depending on lighting conditions and are enhanced when necessary by 12 integrated Infra Red LEDs, meaning performance is guaranteed around the clock, day or night.
- ▶ Easily adjustable, the camera can be installed anywhere on board and used as a rear view camera, for docking, monitoring the engine room and salon and keeping an eye on who's coming and going. In fact, wherever there's a blind spot, the C50 marine camera resolves the problem. Available in standard or reverse image.



Only 2.4" in diameter,
the size of a golf ball!

ABOUT KJM

KJM is dedicated to providing the finest in shipboard cameras and video equipment. Our high quality cameras are built to withstand the harsh marine environment, and are designed by people with over three decades of experience in the marine industry. KJM cameras provide crystal-clear images of whatever you need to monitor, from the engine room to the aft deck. Built to exacting standards from the finest materials, KJM products are rugged, available in a wide variety of styles and configurations, and will work with most marine monitors. No matter what your marine surveillance requirements, KJM has a product to meet your need.

Distributed by:

SeaWide
DISTRIBUTION



Dimensions →
2.4" Dia. x 1.8"H



12 x Infra Red LEDs →

Operative Range (Tilt ; 10~90°/Manual)

Operative Range (Rotate ; 360°/Manual)

Standard f=3.6mm Focused to Infinity

Specifications

* DESIGN AND SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

Dimension	2.4" (W) x 1.8" (H) x 2.4" (D)
Weight	7.2 oz.
Material	Aluminium / White powdercoat finish
Environmental Rating	IP66
Imaging	1/3" SONY Super HAD CCD
Image Resolution	420 TVL
Total Pixels	PAL: 537(H) x 597(V) NTSC: 537(H) x 505(V)
Effective Pixels	PAL: 500(H) x 582(V) NTSC: 510(H) x 492(V)
Video System	PAL / NTSC
Scanning	PAL: 15,625KHz(H) / 50Hz; NTSC: 15,734KHz(H) / 59.94Hz
White Balance	Automatic (ATW)
Output Signal	1 x BNC 1V P-P 75 Ohms Composite Video
Usable Illumination	0 Lux with IR LED
Shutter Speed	Auto: PAL 1/50-1/100,000 Sec; NTSC 1/60-1/100,000 Sec
AGC	ON / OFF
BLC	ON / OFF
Number of LEDs	12 PCS
Lens	3.6 mm. Fixed
IR Illumination	12 Pieces / IR Distance = up to 49'
Power	DC12V 60mA (120mA LED ON)
Operating Temperature	Minus 10 degrees C, +50 degrees C
Relative Humidity	5% to 90%
Signal / Noise	More than 48db

Covered by a 1 year parts and workmanship warranty in the unlikely event you experience a problem.

P (866) SEAWIDE • F (949)-645-7204 • WWW.SEAWIDE.COM